

07/10/00



JCS64 U.S. PTO

07-11-00

A

Please type a plus sign (+) inside this box → ☒
 PTO/SB/05 (4/98)
 Approved for use through 09/30/2000. OMB 0651-0032
 Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No. 678-514 (P9464)
	First Inventor or Application Identifier Se-Hyoung Kim
	Title Apparatus and Method for Controlling...
	Express Mail Label No. EL484185404US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 44] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 24] 4. Oath or Declaration [Total Pages 2] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) c. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee) <input type="checkbox"/> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input type="checkbox"/> * Small Entity Statement filed in prior application, Statement(s) <input type="checkbox"/> Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
 Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code Label _____ or <input checked="" type="checkbox"/> Correspondence address below (Insert Customer No. or Attach bar code label here)					
Name	Paul J. Farrell				
Address	Dilworth & Barrese 333 Earle Ovington Blvd.				
City	Uniondale	State	NY	Zip Code	11553
Country	U.S.	Telephone	(516) 228-8484	Fax	(516) 228-8516

Name (Print/Type)	Paul J. Farrell	Registration No. (Attorney/Agent)	33,494
Signature	<i>Paul J. Farrell</i>	Date	July 10, 2000

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this correspondence and the documents referred to as enclosed are being deposited with the United States Postal Service on date below in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484185404US addressed to: Assistant Commissioner for Patents, Box Patent Application, Washington, D.C. 20231.

Dated: July 10, 2000

Tidge Holmberg

PATENT

Atty. Docket No. 678-514 (P9464)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Assistant Commissioner
for Patents
Washington, D.C. 20231

UTILITY APPLICATION FEE TRANSMITTAL

Sir:

Transmitted herewith for filing is the patent application of

Inventor(s): Se-Hyoung KIM; Min-Goo KIM; Beong-Jo KIM and Soon-Jae CHOI

For: APPARATUS AND METHOD FOR CONTROLLING A DEMULTIPLEXER
AND A MULTIPLEXER USED FOR RATE MATCHING IN A MOBILE
COMMUNICATION SYSTEM

Enclosed are:

[X] 32 page(s) of specification

[X] 1 page(s) of Abstract

[X] 11 page(s) of claims

[X] 24 sheets of drawings [X] formal ☐ informal

[X] 2 page(s) of Declaration and Power of Attorney

[X] An Assignment of the invention to Samsung Electronics Co., Ltd.

CERTIFICATION UNDER 37 C.F.R. § 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date July 10, 2000 in an envelope as "Express Mail Post Office to Addressee" Mail Label Number EL484185404US addressed to: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

Tidge Holmberg

(Type or print name of person mailing paper)

(Signature of person mailing paper)

- ☐ This application claims the benefit under 35 U.S.C. §119(e) of U.S. Provisional Application(s) No(s).:

APPLICATION NO(S).:

FILING DATE

/

/

- ☒ Certified copy of applications

<u>Country</u>	<u>Appln. No.</u>	<u>Filed</u>
Korea	99-27407	July 8, 1999
Korea	99-30095	July 23, 1999
Korea	99-37496	August 30, 1999

from which priority under Title 35 United States Code, § 119 is claimed
☐ is enclosed.

☒ will follow.

CALCULATION OF UTILITY APPLICATION FEE

For	Number Filed	Number Extra	Rate	Basic Fee \$690.00
TOTAL CLAIMS	60	40	x 18 =	\$720.00
INDEPENDENT CLAIMS	5	2	x 78 =	\$156.00
<input type="checkbox"/> Multiple Dep. Claim	0		260	\$0
			TOTAL \$1,566.00	

- ☐ Verified Statement of "Small Entity" Status Under 37 C.F.R. § 1.27. Reduced fees under 37 C.F.R. § 1.9(f) (50% of total) paid herewith \$.

*Includes all independent and single dependent claims and all claims referred to in multiple claims. See 37 C.F.R. § 1.75(c).

'APPARATUS AND METHOD FOR CONTROLLING
A DEMULTIPLEXER AND A MULTIPLEXER USED FOR RATE MATCHING
IN A MOBILE COMMUNICATION SYSTEM

PRIORITY

This application claims priority to applications entitled "Apparatus and Method for Controlling Demultiplexer and Multiplexer for Rate Matching in Mobile Communication System" filed in the Korean Industrial Property Office on July 8, 1999 and assigned Serial No. 99-27407, "Apparatus and Method for Controlling Demultiplexer and Multiplexer for Rate Matching in Mobile Communication System" filed in the Korean Industrial Property Office on July 23, 1999 and assigned Serial No. 99-30095, and "Apparatus and Method for Controlling Demultiplexer and Multiplexer for Rate Matching in Mobile Communication System" filed in the Korean Industrial Property Office on August 30, 1999 and assigned Serial No. 99-37496, the contents of all of which are hereby incorporated by reference.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates generally to the rate matching of a channel encoded signal, and in particular, to an apparatus and method for controlling a demultiplexer (DEMUX) and a multiplexer (MUX) used for rate matching.

2. Description of the Related Art

In general, radio communication systems, such as satellite, ISDN (Integrated

Services Digital Network), W-CDMA (Wide band-Code Division Multiple Access), UMTS (Universal Mobile Telecommunication System), and IMT (International Mobile Telecommunication)-2000 systems, channel-encode source user data with an error correction code prior to transmission, in order to increase system reliability. Typical codes used for channel encoding are convolutional codes and linear blocks code for which a single decoder is used. Lately, turbo codes, which are useful for data transmission and reception, have been suggested.

A multiple-access and multiple-channel communication system matches the number of channel encoded symbols to a given number of transmission data symbols to increase data transmission efficiency and system performance. This operation is called rate matching. Puncturing and repetition are widely performed to match the data rate of channel encoded symbols. Rate matching has recently emerged as a significant factor in UMTS for increasing data transmission efficiency in the air interface and for improving system performance.

FIG. 1 is a block diagram of an uplink transmitting device in a general mobile communication system (a UMTS system, herein).

Referring to FIG. 1, a channel encoder 110 receives frame data at predetermined TTIs (Transmission Time Intervals) which may be 10, 20, 40, or 80ms, and encodes the received frame data. And the channel encoder 110 outputs encoded symbols according to a predetermined coding rate R. The frame data size (number of information bits) is determined by a (data rate of the frame data) * (TTI). If tail bits are not considered, the number of encoded symbols are determined by the (frame data size) * (coding rate R). A 1st interleaver 120 interleaves the output of the channel encoder 110. A radio frame segmenter 130 segments interleaved symbols received from the 1st interleaver 120 into 10-ms radio frame blocks of which size is determined by (the number of encoded

symbols)/(10), wherein 10 is the radio frame length unit. A rate matcher 140 matches the data rate of a radio frame received from the radio frame segmenter 130 to a preset data rate by puncturing or repeating symbols of the radio frame. The above-described components can be provided for each service.

5

A MUX 150 multiplexes rate-matched radio frames from each service. A physical channel segmenter 160 segments the multiplexed radio frames received from the MUX 150 into physical channel blocks. A 2nd interleaver 170 interleaves the physical channel blocks received from the physical channel segmenter 160. A physical
10 channel mapper 180 maps the 2nd-interleaved blocks on physical channels for transmission.

678-514 (P9464)

15

As shown in FIG. 1, the UMTS uplink transmitting device is provided with rate matchers 140. The rate matcher 140 varies in configuration depending on whether the
15 channel encoder 110 is a convolutional encoder or a turbo encoder.

20

When a linear block code is used (a convolutional encoder and a single decoder are used in this case) for the channel encoder, the following requirements of rate matching should be satisfied to increase data transmission efficiency and system
20 performance in a multiple-access/multiple-channel scheme.

25

1. An input symbol sequence is punctured/repeated in a predetermined periodic pattern.

2. The number of punctured symbols is minimized whereas the number of repeated symbols is maximized.

3. A uniform puncturing/repeating pattern is used to puncture/repeat encoded

symbols uniformly.

The above requirements are set on the assumption that the error sensitivity of a code symbol at any position in one frame output from a convolutional encoder is similar.

5 Although some favorable results can be produced using the above requirements, a rate matching scheme different from the convolutional encoder should be employed when using a turbo encoder because of the different error sensitivities of symbols at different positions in one frame.

10 When a turbo encoder is used, it is preferred that the systematic information part of the encoded symbols is not punctured since the turbo encoder is a systematic encoder. Due to the two component encoder structure of the turbo encoder, the minimum free distance of the output code is maximized when the minimum free distance of each of the two component codes is maximized. To do so, the output symbols of the two component
15 encoders should be punctured equally to thereby achieve optimal performance.

As described above, a distinction should be made between the information symbols and the parity symbols in the encoded symbols when a turbo encoder is used, to achieve optimal rate matching. Processing, such as channel interleaving, can be
20 interposed between the turbo encoder and a rate matcher. Nevertheless, the distinction between information symbols and parity symbols should be preserved. However, this is impossible because all of the channel encoded symbols are randomly mixed after channel interleaving.

25 SUMMARY OF THE INVENTION

An object of the present invention is to provide an apparatus and method for performing rate matching separately on information symbols and parity symbols during

symbol encoding in an uplink transmitting device of a mobile communication system.

Another object of the present invention is to provide an apparatus and method for disposing a DEMUX before a rate matcher in order to separate symbol data into information symbols and parity symbols in a mobile communication system.

A further object of the present invention is to provide an apparatus and method for controlling a DEMUX and a MUX for use in rate matching in an uplink transmitting device of a mobile communication system.

Still another object of the present invention is to provide an apparatus and method for controlling a DEMUX and a MUX for use in the rate matching of a turbo-encoded signal in an uplink transmitting device of a mobile communication system.

To achieve the above and other objects, there is provided a transmitting device in a mobile communication system. In the preferred embodiments of the transmitting device, an encoder receives an information bit stream in a frame as long as an integer multiple of a predetermined size and generates an information symbol and first and second parity symbols by encoding each information bit. An interleaver sequentially arranges information symbols and the first and second parity symbols corresponding to each of the information symbols row by row in an array having a number of rows and a number of columns. The number of rows and the number of columns in the array are both integers. The interleaver reorders the columns according to a predetermined rule, reading the symbols down by column from left to right, and outputs a plurality of radio frames in a stream, each radio frame having a size determined by $L/(TTI/10\text{ms})$, where L is number of coded symbols. A demultiplexer demultiplexes each of the radio frames received from the interleaver to the information symbols, the first parity symbols, and the second parity symbols of the radio frame. Rate matchers bypass the information

symbols and puncture or repeat the first and second parity symbols for rate matching.

BRIEF DESCRIPTION OF THE DRAWINGS

5 The above and other objects, features and advantages of the present invention will become more apparent from the following detailed description when taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram of an uplink transmitting device in a conventional mobile communication system;

10 FIG. 2 is a block diagram of an uplink transmitting device provided with a DEMUX and a MUX for rate matching, according to the preferred embodiments of the present invention;

FIG. 3 illustrates an example of turbo encoder input and turbo encoder output in the uplink transmitting device of FIG. 2;

15 FIG. 4 illustrates an example of 1st-interleaver input with coding rate $R = 1/3$ in the uplink transmitting device of FIG. 2;

FIGs. 5A, 5B, and 5C illustrate examples of 1st-interleaver output with $R = 1/3$ in the uplink transmitting device of FIG. 2;

20 FIG. 6 illustrates an example of 1st-interleaver input with $R = 1/2$ in the uplink transmitting device of FIG. 2;

FIGs. 7A, 7B, and 7C illustrate examples of 1st-interleaver output with $R = 1/2$ in the uplink transmitting device of FIG. 2;

FIGs. 8A to 8D illustrate examples of radio frame segmenter output in the uplink transmitting device of FIG. 2;

25 FIGs. 9A, 9B, and 9C illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a first embodiment of the present invention;

FIGs. 10A, 10B, and 10C illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a second embodiment of the present

invention;

FIGs. 11A to 11D illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a third embodiment of the present invention;

FIGs. 12A, 12B, and 12C illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a fourth embodiment of the present invention;

FIG. 13 is a block diagram of a DEMUX & MUX controlling apparatus according to an embodiment of the present invention;

FIG. 14 is a block diagram of a DEMUX & MUX controlling apparatus according to another embodiment of the present invention; and

FIG. 15 is a block diagram of a DEMUX & MUX controlling apparatus according to yet another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described hereinbelow with reference to the accompanying drawings. In the following description, well-known functions or constructions are not described in detail since they would obscure the invention in unnecessary detail.

For rate matching, the UMTS uplink transmitting device of FIG. 1 has rate matcher 140 that varies in structure depending on whether channel encoder 110 is a convolutional encoder or a turbo encoder, as stated before. When a turbo encoder is used as the channel encoder 110 according to the preferred embodiments of the present invention, the rate matcher 140 is so constituted as to include a DEMUX 141, component rate matchers 142, 143, and 144, and a MUX 145, as shown in FIG. 2. The DEMUX 141 separates the output symbols of the radio frame segmenter 130 into information symbols and parity symbols and switches them to the corresponding

component rate matchers 142, 143, and 144. The MUX 145 multiplexes symbols received from the component rate matchers 142, 143, and 144 and feeds the multiplexed symbols to the MUX 150 of FIG. 1.

5 The uplink transmitting device shown in FIG. 2 is so constituted that the systematic information symbols of encoded symbols is not punctured in view of the fact that a turbo code is a systematic code. It is preferred that the two component encoders are connected in parallel in the turbo encoder and that the minimum free distance between final codes maximizes that of each component encoder. The consideration that
10 the best performance can be achieved by equal puncturing of the output symbols of the two component encoders is reflected in the constitution of the uplink transmitting device in FIG. 2.

According to the preferred embodiments of the present invention, the DEMUX
15 141 is located between radio frame segmenter 130 and component rate matchers 142, 143, and 144, while MUX 145 is located between component rate matchers 142, 143, and 144 and MUX 150 in the uplink transmitting device.

In the embodiment of the present invention shown in Fig. 2, the DEMUX 141
20 and MUX 145 are synchronized with each other such that the DEMUX 141 and MUX 145 switch to the same rate matcher block (i.e., if DEMUX 141 switches to rate matcher 142 to input a symbol into the DEMUX 141, then MUX also switches to the rate matcher 142 after the input symbol has been rate matched to receive the rate matched symbol.).

25 The turbo code used in turbo encoder 110 of FIG. 2 is a systematic code and, thusly, can be separated into a systematic information symbol X_k and parity symbol Y_k and Z_k . For turbo encoder 110, code rate $R = 1/3$. Hereinafter, the systematic

information symbol will be labeled with x and the first parity symbols with y and second parity symbols with z . When $R = 1/3$, the relationship between the input and output of the turbo encoder 110 is shown in FIG. 3.

Referring to FIG. 3, the turbo encoder output is a sequence of an information symbol x_1 , a first parity symbol y_1 , a second parity symbol z_1 , an information symbol x_2 , a first parity symbol y_2 , a second parity symbol z_2 , an information symbol x_3 , a first parity symbol y_3 , a second parity symbol z_3 , ... in this order.

The 1st interleaver 120 interleaves encoded symbols at a TTI (Transmission Time Interval) according to the number of input symbols. Interleaving can be considered in two steps.

First Step

1. The total number of columns is determined referring to Table 1 shown below.
2. A minimum integer R_1 is found in an equation given by

$$K_1 \leq R_1 \times C_1 \quad \dots (1)$$

where R_1 is the number of rows, K_1 is the length of the input block (total encoded symbols), and C_1 is the number of columns, wherein the number of columns C_1 is 1, 2, 4 or 8 according to TTIs.

3. The input symbols of the 1st-interleaver are sequentially arranged by rows in an rectangular array having R_1 rows and C_1 columns.

Second Step

1. Columns are reordered according to an inter-column permutation pattern $\{P_1(j)\}$ ($j = 0, 1, \dots, C-1$) shown in Table 1. $P_1(j)$ represents the original column of a j^{th} permuted column and the pattern is derived by a bit reverse method. In the bit reverse

method, the binary bit sequence of each number is reversed, e.g., 00→00, 01→10, 10→01, and 11→11, as shown by the 40 ms TTI row in Table 1.

(Table 1)

TTI	Total number of columns	inter-column permutation patterns
10ms	1	{0}
20ms	2	{0, 1}
40ms	4	{0, 2, 1, 3}
80ms	8	{0, 4, 2, 6, 1, 5, 3, 7}

2. The 1st-interleaver output is a sequence resulting from reading the permuted $R_1 \times C_1$ array by columns. Bits that do not exist in the 1st-interleaver input are excluded from outputting by eliminating I_1 defined as

$$I_1 = R_1 \times C_1 - K_1 \quad \dots \dots (2)$$

By interleaving using Eqs. 1 and 2, the 1st interleaver 120 outputs interleaved symbols in a similar pattern as a turbo encoder output pattern, that is, in the pattern of x, y, z, x, y, z, ... (or x, z, y, x, z, y, ... with parity symbols z and y exchanged in position).

When TTI is 10ms, the number of columns C_1 is 1. Therefore, the 1st interleaver input and the 1st interleaver output are identical.

FIG. 4 illustrates an example of 1st-interleaver input after turbo-encoding 160 input bits at $R = 1/3$ and the TTI=80ms. In FIG. 4, a blank rectangle denotes a system information symbol x, a rectangle marked with slant lines denotes a first parity symbol y, and a rectangle marked black denotes a second parity symbol z.

In FIG. 4, the 1st interleaver 120 sequentially receives code symbols 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, ..., 160 from the turbo encoder 110. Each number represents an order of encoded symbol received from the turbo encoder 110. The numbers also indicate the order by which each of the numbers has been received in the interleaver 120 (i.e., '1' has been received first by the interleaver 120, '2' has been received second, etc.). Because of the nature of a turbo code, the 1st-interleaver input follows the pattern of x, y, z, x, y, z, x, y, z,

FIG. 5A illustrates an example of 1st-interleaver output when $R = 1/3$ and TTI = 20ms. Referring to FIG. 5A, the 1st-interleaver output sequence is 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, ..., 160 in an interleaved order in the pattern of x, z, y, x, z, y, x, z, y,

FIG. 5B illustrates an example of 1st-interleaver output when $R = 1/3$ and TTI = 40ms. Referring to FIG. 5B, the 1st-interleaver output sequence is 1, 5, 9, 13, 17, 21, 25, 29, 33, ..., 160 in an interleaved order in the pattern of x, y, z, x, y, z, x, y, z,

FIG. 5C illustrates an example of 1st-interleaver output when $R = 1/3$ and TTI = 80ms. Referring to FIG. 5C, the 1st-interleaver output sequence is 1, 9, 17, 25, 33, 41, 49, 57, 65, ..., 160 in an interleaved order in the pattern of x, z, y, x, z, y, x, z, y,

FIG. 6 illustrates an example of 1st-interleaver input after turbo encoding 160 input bits at code rate $R = 1/2$ and TTI = 80ms. When TTI = 10ms, the 1st-interleaver input is identical to the 1st-interleaver output. In FIG. 6, a blank rectangle denotes a system information symbol x and a rectangle marked with black dots denotes a parity symbol y.

In FIG. 6, the 1st interleaver 120 sequentially receives encoded symbols 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, ..., 160 from the turbo encoder 110. Each number represents an order

of encoded symbol received from the turbo encoder 110. Because of the nature of the turbo code, the 1st-interleaver input follows the pattern of x, y, x, y, x, y,

FIG. 7A illustrates an example of 1st-interleaver output when $R = 1/2$ and TTI = 20ms. Referring to FIG. 7A, the 1st-interleaver output sequence is 1, 3, 5, 7, 9, 11, 13, 15, 17, 19, ..., 159, 2, 4, 6, 8, ..., 160 in an interleaved order. The first half {1, 3, 5, ..., 159} of the interleaver output is information symbols x, and the last half {2, 4, 6, ..., 160} is parity symbols y. That is, the information symbols are followed by the parity symbols in the 1st-interleaver output.

FIG. 7B illustrates an example of 1st-interleaver output when $R = 1/2$ and TTI = 40ms. Referring to FIG. 7B, the 1st-interleaver output sequence is 1, 5, 9, 13, ..., 155, 159, 2, 6, 10, 14, ..., 156, 160 in an interleaved order. The first half {1, 5, 9, 13, ..., 159} of the interleaver output is information symbols x, and the last half {2, 6, 10, 14, ..., 156, 160} is parity symbols y. That is, the information symbols are followed by the parity symbols in the 1st-interleaver output.

FIG. 7C illustrates an example of 1st-interleaver output when $R = 1/2$ and TTI = 80ms. Referring to FIG. 7C, the 1st-interleaver output sequence is 1, 9, 17, 25, ..., 127, 135, 143, 151, 159, 2, 10, 18, ..., 144, 152, 160 in an interleaved order. The first half {1, 9, 17, 25, ..., 143, 151, 159} of the interleaver output is information symbols x, and the last half {2, 10, 18, ..., 144, 152, 160} is parity symbols y. That is, the information symbols are followed by the parity symbols in the 1st-interleaver output.

The interleaver outputs shown in FIGs. 5A, 5B, and 5C are given on the assumption that an interleaver size (= 160) is an integer multiple of TTI/10ms (= 1, 2, 4, or 8). In case an interleaver size is not an integer multiple of TTI/10ms, a different 1st-interleaver output is produced.

The radio frame segmenter 130 of FIG. 2 segments a frame of 10, 20, 40, or 80ms into 10-ms radio frame blocks. Because the ratio (L/T) of an input frame size (L) to the TTI ($T=TTI/10\text{ms}$) of an input frame is not always an integer, the number (r) of filler bits is calculated by Eq. 3 to compensate for L/T with the filler bits (L is in units of bits or symbols). Here, $T \in \{1, 2, 4, 8\}$. If the input frame size (number of coded symbols) of the first interleaver is an integer multiple of $TTI/10\text{ms}$, the filler bit is not needed ($r=0$). If the TTI is 20ms and the input frame size is not an integer multiple of $2(TTI/10\text{ms})$, the number of filler bits r is 1. If the TTI is 40ms and the input frame size is not an integer multiple of 4, the number of filler bit r can be 1, to 3. If the TTI is 80ms and the input frame size is not an integer multiple of 8, the number of filler bits can be 1 to 7. The $(L+r)/T$ value resulting from the filler bits is defined as R (number of row).

$$r = T - (L \bmod T) \quad \dots\dots (3)$$

where $r \in \{0, 1, 2, 3, \dots T-1\}$.

$$R_i = (L_i + r_i)/T_i \quad \dots\dots (4)$$

If r is not 0, the radio frame segmenter 130 inserts a filler bit into the last bit position of a corresponding frame from a $(T-r+1)^{\text{th}}$ radio frame in order to maintain a radio frame size of R . The filler bit is arbitrarily chosen as a 0 or 1. Now a description will be made of the bit-basis operation of the radio frame segmenter 130.

For description of bits prior to processing in the radio frame segmenter 130, it is assumed that the number of filler bits r has been calculated. Here, t represents the index of a radio frame, ranging from 1 through T ($1 \leq t \leq T$). $t = 1$ for the first radio frame, $t = 2$ for the second radio frame, and similarly, $t = T$ for the last radio frame. Each radio frame is the same size $(L+r)/T$. It is assumed that the 1st-interleaver output is b_1, b_2, \dots ,

$b_L, T (=TTI/10\text{ms}) \in \{1, 2, 4, 8\}$, and the radio frame segmenter output symbols are $c_1, c_2, \dots, c_{(L+r)/T}$ in a 10-ms frame. Then,

(Table 2)

output symbols of the radio frame segmenter for the first 10msec: $t = 1$
$c_j = b_j \quad j = 1, 2, \dots, (L+r)/T$
output symbols of the radio frame segmenter for the second 10msec: $t = 2$
$c_j = b_{(j+(L+r)/T)} \quad j = 1, 2, \dots, (L+r)/T$
:
output symbols of the radio frame segmenter for the $(T-r)^{\text{th}}$ 10msec: $t = (T-r)$
$c_j = b_{(j+(T-r-1)(L+r)/T)} \quad j = 1, 2, \dots, (L+r)/T$
output symbols of the radio frame segmenter for the $(T-r+1)^{\text{th}}$ 10msec: $t =$ $(T-r+1)^{\text{th}}$
$c_j = b_{(j+(T-r)(L+r)/T)} \quad j = 1, 2, \dots, (L+r)/T-1$
$c_j = \text{filler_bit (0/1)} \quad j = (L+r)/T$
:
output bits of the radio frame segmenter for the T^{th} 10msec: $t = T$
$c_j = b_{(j+(T-1)(L+r)/T)} \quad j = 1, 2, \dots, (L+r)/T-1$
$c_j = \text{filler_bit (0/1)} \quad j = (L+r)/T$

5

10

The purpose of using the component rate matchers 142, 143, and 144 of FIG. 2 is to increase the data transmission efficiency and improve system performance in a multiple-access/multiple-channel system using the above-described channel encoding mechanism. Rate matching refers to control of input bit number to output bit number through puncturing when the input size is larger than the output size or repetition when the input size is smaller than the output size. The symbol puncturing or repetition is generally performed periodically but the following should be considered for rate

matching when a turbo code is used.

1. Because the turbo code is a systematic code, a systematic information symbol part of encoded symbols should be excluded from puncturing.

2. The minimum free distance between final codes preferably maximizes that of each component encoder since two component encoders are connected in parallel in a turbo encoder by definition of a turbo code. Therefore, the output symbols of the two component encoders should be equally punctured to achieve optimal performance.

In the rate matching structure shown in FIG. 2, rate matching is implemented separately for each component rate matcher. The first, second, and third component rate matchers 142, 143, and 144 subject an information symbol x , a first parity symbol y , and a second parity symbol z , respectively, to rate matching. According to a given input and output sizes, each rate matcher performs puncturing/repetition on a predetermined number of symbols. This rate matching structure is built on the assumption that the DEMUX 141 outputs x , y , z , separately. Hence, the DEMUX 141 should be able to separate a radio frame received from the radio frame segmenter 130 into symbols x , y , z in a certain order.

A description of radio frame output patterns of the radio frame segmenter 130 will be given. Radio frames are read down by columns and each column corresponds to a radio frame.

FIG. 8A illustrates an output pattern of the radio frame segmenter 130 when $R = 1/3$ and $TTI = 10\text{ms}$. Referring to FIG. 8A, a radio frame output pattern is identical to a radio frame input pattern, that is, x, y, z, x, y, z, \dots

FIG. 8B illustrates an output pattern of the radio frame segmenter 130 when code rate $R = 1/3$ and TTI = 20ms. Referring to FIG. 8B, a first radio frame RF #1 is output in the pattern of x, z, y, x, z, y, ... and a second radio frame RF #2 is output in a radio frame pattern of ..., x, y, x, z, y, x, z, The output patterns correspond to the

FIG. 8C illustrates an output pattern of the radio frame segmenter 130 when $R = 1/3$ and TTI = 40ms. Referring to FIG. 8C, a first radio frame RF #1 is output in the pattern of ..., x, y, z, x, y, z, ..., a second radio frame RF #2 in the pattern of ..., z, x, y, z, x, y, ..., a third radio frame RF #3 in the pattern of ..., y, z, x, y, z, x, ..., and a fourth radio frame RF #4 in the pattern of ..., x, y, z, x, y, z, The output patterns correspond to the output from the 1st interleaver shown in Fig. 5B.

FIG. 8D illustrates an output pattern of the radio frame segmenter 130 when $R = 1/3$ and TTI = 80ms. Referring to FIG. 8D, a first radio frame RF #1 is output in the pattern of ..., x, z, y, x, z, y, ..., a second radio frame RF #2 in the pattern of ..., y, x, z, y, x, z, ..., a third radio frame RF #3 in the pattern of ..., z, y, x, z, y, x, ..., a fourth radio frame RF #4 in the pattern of ..., x, z, y, x, z, y, ..., a fifth radio frame RF #5 in the pattern of ..., y, x, z, y, x, z, ..., a sixth radio frame #6 in the pattern of ..., z, y, x, z, y, x, a seventh radio frame RF #7 in the pattern of ..., x, z, y, x, z, y, ..., and an eighth radio frame RF #8 in the pattern of ..., y, x, z, y, x, z, The output patterns correspond to the output from the 1st interleaver shown in Fig. 5C.

Output patterns of the radio frame segmenter 130 have a certain regularity. Each radio frame pattern with the same TTI has a different initial symbol x, y, or z but has the same symbol repeating pattern. For TTIs = 10ms and 40ms, symbols are repeated in the pattern of ..., x, y, z, x, y, z, ..., and for TTIs = 20ms and 80ms, symbols are repeated in the pattern of x, z, y, x, z, y,

The radio frames in the above cases are free of a filler bit. This is because the input size is an integer multiple of TTI/10ms. When filler bits are to be inserted, radio frames have different patterns from the above-described patterns. The first through fourth embodiments as described below pertain to insertion of filler bits.

First Embodiment

FIGs. 9A, 9B, and 9C illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a first embodiment of the present invention.

If the input of the 1st interleaver 120 for TTI = 80ms is given in FIG. 9A, it is interleaved by columns according to an interleaving rule of the 1st interleaver 120, as shown in FIG. 9B. Then, symbols are read down each column starting from the left to the right column in the array of FIG. 9B. The resulting 1st-interleaver output (i.e., the radio segmenter input) is x, z, y, x, z, y, x, z, y, z, y, x, z, y, x, z, y, x, y, x, z, y, x, z, y, x, z, x, z, y, x, z, y, x, z, y. The output of the radio frame segmenter 130 results from adding filler bits to the radio frame segmenter input.

In the first embodiment, the filler bits are 0s. In the first embodiment of the present invention, the radio frame segmenter 130 outputs the symbols received from the interleaver 120 in a such way that the all of the filler bits are placed towards the end of the last row, as shown in Fig. 9C. In Fig. 9B, the last positions in the second, fourth, sixth and eight columns are empty. Instead of filling those positions with filler bits, the next symbol coming after the empty position is used to fill the empty position. For example, to fill the last position in the second column, the 'z' symbol from the first position in the third column is moved in to the empty position in the second column. The position previously occupied by the 'z' symbol is now occupied by the 'y' symbol which came after the 'z' symbol in the third column. Basically the positions of the

symbols have been pushed up by one position. This process is repeated to fill the empty position in the fourth column, and so on. However, the last positions in the last four columns (i.e., column #5, 6, 7 and 8) are filled with the filler bits so that the filler bits are pushed towards the end of the last row, as shown in Fig. 9C. Symbols in the array of FIG. 9C are read column by column and each column represents one radio frame. As shown in FIG. 9C, each radio frame has a different initial symbol but follows the same symbol repeating pattern of x, z, y, except for radio frames 4 and 6 because of the position shifting. However, the repeating patterns for the radio frames 4 and 6, which are shown below in Table 15, can be used. The patterns in the radio frames follow the predetermined repeating patterns shown in Table 15 except for the tail ends of certain radio frames. In those cases, the tail ends are ignored and treated as if the tail ends follow the predetermined repeating patterns shown in Table 15 and are rated matched according to the predetermined repeating patterns. That is, the radio frames have different initial symbols in the filler bit inserting case, as compared to the filler bit-free case.

Although filler bits are inserted, radio frames may have the same initial symbols as those in the filler bit-free case. An example of such a case using three filler bits for TTI = 40ms will be described.

FIGs. 10A and 10B illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to the first embodiment.

If the input of the 1st interleaver 120 for TTI = 40ms is given in FIG. 10A, it is interleaved by columns according to an interleaving rule of the 1st interleaver 120 as shown in FIG. 10B. The resulting 1st-interleaver output (i.e., the radio segmenter input) is x, y, z, x, y, z, z, x, y, z, x, y, z, x, y, z, x, y, z, x, y. The output of the radio frame segmenter 130 shown in FIG. 10C results from adding filler bits to the radio frame

segmenter input.

The filler bits are 0s. Symbols in the array of FIG. 10C are read column by column and each column represents one radio frame. As shown in FIG. 10C, each radio frame has a different initial symbol but follows the same symbol repetition pattern of ..., x, y, z, That is, the radio frames have the same initial symbols in this filler bit inserting case as those in the filler bit-free case.

The initial symbol of each radio frame is determined by a TTI and the number of filler bits added by the radio frame segmenter 130. Herein below, initial symbols in all possible cases will be described. Tables 3 to 6 list initial symbols for TTIs = 10, 20, 40, and 80ms, respectively, when the radio frame segmenter 130 outputs radio frames RF#1, RF #2, RF #3, RF #4, RF #5, RF #6, RF #7, and RF #8 sequentially.

(Table 3)

TTL = 10ms

total number of filler bits	Initial symbol of	
	RF #1	
0	x	

(Table 4)

TTL = 20ms

total number of filler bits	Initial symbol of	
	RF #1	RF #2
0, 1	X	y

In Table 4, since the 1st interleaver 120 leaves the columns intact, positions are

not changed when one filler bit is used. Consequently, the initial symbols are the same as those in the filler bit-free case.

(Table 5)

TTL = 40ms

total number of filler bits	Initial symbol of			
	RF #1	RF #2	RF #3	RF #4
0, 1, 3	x	z	y	x
2	x	z	z	x

When one or three filler bits are used, the number of symbols in each column before interleaving is equal to that of symbols in the column of the same index after interleaving. Therefore, the initial symbols are the same as those in the filler bit-free case. If two filler bits are used, the number of symbols in each column before interleaving is different from that of symbols in the column of the same index after interleaving. Therefore, the initial symbols are different from those in the filler bit-free case.

(Table 6)

TTL = 80ms

total number of filler bits	initial symbol of							
	RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
0, 1, 7	x	y	z	x	Y	z	x	y
2, 3	x	y	z	x	X	y	z	y
4	x	y	y	z	Z	y	z	y
5, 6	x	y	y	z	X	z	x	y

When one or seven filler bits are used, the number of symbols in each column before interleaving is equal to that of symbols in the column of the same index after interleaving. Therefore, the initial symbols are the same as those in the filler bit-free case. If two, three, four, five, or six filler bits are used, the number of symbols in each column before interleaving is different from that of symbols in the column of the same index after interleaving. Therefore, the initial symbols are different from those in the filler bit-free case.

As noted from the above tables, symbols are repeated in the pattern of x, y, z, x, y, z, for TTIs = 10ms and 40ms, whereas symbols are repeated in the pattern of x, z, y, x, z, y, for TTIs = 20ms and 80ms.

Therefore, given a TTI and the number of filler bits to be inserted by the radio frame segmenter 130, the DEMUX 141 demultiplexes 1st-interleaver output in the above-described manner.

Second Embodiment

FIGs. 11A to 11D illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a second embodiment of the present invention. The second embodiment is different from the first embodiments in that filler bits are inserted by the 1st interleaver 120 instead of the radio frame segmenter 130. Instead of pushing the filler bit positions to the end of the last row, as in the first embodiment (i.e., FIG. 9C), the interleaver 120 fills the empty positions with filler bits, as shown in FIG. 11C. In terms of initial symbols and repeating patterns, this case is the same as the typical filler bit-free case.

If the input of the 1st interleaver 120 for TTI = 80ms is given as in FIG. 11A, it is interleaved by columns according to an interleaving rule of the 1st interleaver 120 as

shown in FIG. 11B. Then, filler bits are inserted to the array of FIG. 11B as shown in FIG. 11C. Here, the filler bits are 0s. Therefore, the 1st-interleaver output, i.e., the radio frame segmenter input is a sequence of x, z, y, x, z, y, z, y, 0, z, y, x, z, y, x, z, y, x, 0, y, x, z, y, x, z, y, x, z, 0, x, z, y, x, z, y, x, z, y, 0. The output of the radio frame segmenter 130 is shown in FIG. 11D.

The symbols in the array of FIG. 11D are read down by column from left to right and each column is a radio frame. As shown in FIG. 11D, each radio frame follows the same repeating pattern of x, z, y with a different initial symbol. As noted from FIGs. 11A to 11D, the initial symbols are the same as those in the general filler bit-free case.

The initial symbol of each radio frame is determined by a TTI. Tables 7 to 10 list initial symbols for TTIs = 10, 20, 40, and 80ms, respectively, when the radio frame segmenter 130 outputs radio frames RF#1, RF #2, RF #3, RF #4, RF #5, RF #6, RF #7, and RF #8 sequentially. The initial symbols of the radio frames in the second embodiment are independent of the total number of the filler bits, as shown below; however, in the first embodiment, the initial symbols of the radio frames are dependent on the total number of the filler bits.

(Table 7)

TTI = 10ms

initial symbol of
RF #1
x

(Table 8)

TTI = 20ms

initial symbol of	
RF #1	RF #2
x	y

(Table 9)

TTI = 40ms

initial symbol			
RF #1	RF #2	RF #3	RF #4
x	z	y	x

(Table 10)

TTI = 80ms

initial symbol of							
RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
X	y	z	x	y	z	x	y

As noted from the above tables, symbols are repeated in the pattern of x, y, z, x, y, z, for TTIs = 10ms and 40ms, whereas symbols are repeated in the pattern of x, z, y, x, z, y, for TTIs = 20ms and 80ms.

Therefore, given a TTI, the DEMUX 141 demultiplexes 1st-interleaver output in the above-described manner.

Third Embodiment

FIGs. 12A, 12B, and 12C illustrate 1st-interleaver input, 1st-interleaver output, and radio frame segmenter output according to a third embodiment of the present invention. The third embodiment is different from the second embodiments in that a

controller (host) designates filler bit insertion positions and the radio frame segmenter 130 inserts the filler bits in the designated positions. In terms of initial symbols and repeating patterns, this case is the same as the typical filler bit-free case.

If the input of the 1st interleaver 120 for TTI = 80ms is given in FIG. 12A, it is interleaved by columns according to an interleaving rule of the 1st interleaver 120 as shown in FIG. 12B. Therefore, the 1st-interleaver output, i.e., the radio frame segmenter input is a sequence of x, z, y, x, z, y, x, z, y, z, y, x, z, y, x, z, y, x, y, x, z, y, x, z, y, x, z, x, z, y, x, z, y, x, z, y. A controller (host) designates filler bit insertion positions and then the radio frame segmenter 130 inserts the filler bits in the designated positions as shown in FIG. 12C.

In this embodiment, the filler bits are 0s. The symbols in the array of FIG. 12C are read down column by column from left to right and each column is a radio frame. As shown in FIG. 12C, each radio frame follows the same repeating pattern of x, z, y with a different initial symbol. As noted from FIGs. 12A, 12B, and 12C, initial symbols are the same as those in the general filler bit-free case.

The initial symbol of each radio frame is determined by a TTI. Tables 11 to 14 list initial symbols for TTIs = 10, 20, 40, and 80ms, respectively, when the radio frame segmenter 130 outputs radio frames RF#1, RF #2, RF #3, RF #4, RF #5, RF #6, RF #7, and RF #8 sequentially. The initial symbols of the radio frames in the third embodiment are independent of the total number of the filler bits, as shown below.

(Table 11)

TTI = 10ms

initial symbol of

RF #1
x

(Table 12)

TTI = 20ms

initial symbol of	
RF #1	RF #2
X	y

5

(Table 13)

TTL = 40ms

initial symbol			
RF #1	RF #2	RF #3	RF #4
X	z	y	x

(Table 14)

TTL = 80ms

initial symbol of							
RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
x	y	z	x	y	z	x	y

10

As noted from the above tables, symbols are repeated in the pattern of x, y, z, x, y, z, for TTIs = 10ms and 40ms, whereas symbols are repeated in the pattern of x, z, y, x, z, y, for TTIs = 20ms and 80ms.

15

Given a TTI, the DEMUX 141 demultiplexes 1st-interleaver output in the above-described manner.

Returning to FIG. 2, the DEMUX 141 demultiplexes a radio frame received from the radio frame segmenter 130 into its symbols x, y, z, according to a switching rule. The switching rule is determined by a TTI and the number of filler bits used by the radio frame segmenter 130 in the first embodiment and a TTI in the second and third embodiments. The symbols are repeated in a certain pattern. The repeating patterns for the embodiments are tabulated in Tables 15 and 16. In the tables, N/A indicates “not applicable”.

(Table 15)

For First Embodiment

TTI	total number of filler bits	Switching rules (repeating patterns)							
		RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
10ms	0	x, y, z	N/A	N/A	N/A	N/A	N/A	N/A	N/A
20ms	0, 1	x, z, y	y, x, z	N/A	N/A	N/A	N/A	N/A	N/A
40ms	0, 1, 3	x, y, z	z, x, y	y, z, x	x, y, z	N/A	N/A	N/A	N/A
	2	x, y, z	z, x, y	z, x, y	x, y, z	N/A	N/A	N/A	N/A
80ms	0, 1, 7	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z
	2, 3	x, z, y	y, x, z	z, y, x	x, z, y	x, z, y	y, x, z	z, y, x	y, x, z
	4	x, z, y	y, x, z	y, x, z	z, y, x	z, y, x	y, x, z	z, y, x	y, x, z
	5, 6	x, z, y	y, x, z	y, x, z	z, y, x	x, z, y	z, y, x	x, z, y	y, x, z

(Table 16)

For Second and Third Embodiments

TTI	Switching rules (repeating patterns)							
	RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
10ms	x, y, z	N/A	N/A	N/A	N/A	N/A	N/A	N/A
20ms	x, z, y	y, x, z	N/A	N/A	N/A	N/A	N/A	N/A
40ms	x, y, z	z, x, y	y, z, x	x, y, z	N/A	N/A	N/A	N/A
80ms	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z

If two filler bits are used for TTI = 40ms in the first and second embodiments, the switching patterns in the DEMUX 141 are x, y, z, x, y, z for the first radio frame, z, x, y, z, x, y for the second radio frame, z, x, y, z, x, y for the third radio frame, and x, y, z, x, y, z for the fourth radio frame.

In the second and third embodiments, the initial symbol of each radio frame only needs to be given because the repeating patterns are already predetermined based on the TTI. However, in the first embodiment, the total number of the filler bits also needs to be given in addition to the other information. Tables 17–19 reflect that difference between the embodiments.

(Table 17)

For First Embodiment

TTI	total number of filler bits	Initial symbol of							
		RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
10ms	0	x	N/A	N/A	N/A	N/A	N/A	N/A	N/A
20ms	0, 1	x	y	N/A	N/A	N/A	N/A	N/A	N/A
40ms	0, 1, 3	x	z	y	x	N/A	N/A	N/A	N/A
	2	x	z	z	x	N/A	N/A	N/A	N/A
80ms	0, 1, 7	x	y	z	x	y	z	x	y
	2, 3	x	y	z	x	x	y	z	y
	4	x	y	y	z	z	y	z	y
	5, 6	x	y	y	z	x	z	x	y

(Table 18)

For Second and Third Embodiments

TTI	initial symbol of							
	RF #1	RF #2	RF #3	RF #4	RF #5	RF #6	RF #7	RF #8
10ms	x, y, z	N/A	N/A	N/A	N/A	N/A	N/A	N/A
20ms	x, z, y	y, x, z	N/A	N/A	N/A	N/A	N/A	N/A

40ms	x, y, z	z, x, y	y, z, x	x, y, z	N/A	N/A	N/A	N/A
80ms	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z	z, y, x	x, z, y	y, x, z

(Table 19)

Repeating Patterns

TTI	Repeating patterns
10ms, 40ms	..., x, y, z, x, y, z, ...
20ms, 80ms	..., x, z, y, x, z, y, ...

Referring to FIG. 2 again, the MUX 145 multiplexes three streams received from the component rate matchers 142, 143, and 144 to one stream, to thereby generate a rate-matched radio frame with the same symbol pattern as before rate matching. Because this MUX 145 is the counterpart of the DEMUX 141, it switches according to the same switching patterns.

FIG. 13 is a block diagram of a DEMUX and MUX controlling apparatus according to the first embodiment of the present invention.

Referring to FIG. 13, upon receipt of a TTI, the total number of the filler bits, and a radio frame length from the host 200, the controller 210 feeds the TTI, the total number of the filler bits, and the radio frame index of a current radio frame to the memory 220 (see Table 17) and receives the initial symbol of the current radio frame from the memory 220. The controller 210 controls the switching operations of the DEMUX 141 and the MUX 145 based on the initial symbol and a repeating/puncturing pattern determined by the TTI. The DEMUX 141 separates the current radio frame symbols into input for the corresponding component rate matchers and the MUX 145 multiplexes the output symbols of the rate matchers to

a radio frame. Here, the DEMUX 141 separates an information symbol, a first parity symbol, and a second parity symbol from a radio frame stream received from the radio frame segmenter 130. The component rate matchers 142, 143, and 144 rate match the information symbol, the first parity symbol, and the second parity symbol from the DEMUX 141, respectively, by puncturing or repetition. The component rate matcher 142 just bypasses the received information symbols without real puncturing, whereas the component rate matchers 143 and 144 puncture the received parity symbols according to a preset pattern which is determined by the ratio of the number of input symbols to the number of output symbols. In most of the real cases, the component rate matchers 143 and 144 just bypass the received parity symbols without real repetition except heavy repetition of the encoded symbols, whereas the component rate matcher 142 repeats the received information symbols according to a preset pattern determined by the ratio of the number of input symbols to the number of output symbols.

The MUX 145 multiplexes the symbols received from the component rate matchers 142, 143, and 144 to one stream according to the same switching pattern as used in the DEMUX 141.

FIG. 14 is a block diagram of a DEMUX and MUX controlling apparatus according to the second embodiment of the present invention.

Referring to FIG. 14, upon receipt of a TTI and a radio frame length from the host 200, the controller 210 feeds the TTI, the total number of filler bits, and the radio frame index of a current radio frame to memory 220 (see Table 17) and receives the initial symbol of the current radio frame from memory 220. The number of filler bits is determined by the controller 210 based on the TTI and the frame length in the same manner as used in the radio frame segmenter. Then, the controller 210 controls the

switching operations of the DEMUX 141 and the MUX 145 based on the initial symbol and a repeating/puncturing pattern determined by the TTI. The DEMUX 141 separates the current radio frame symbols into component rate matchers input and the MUX 145 multiplexes the output symbols of the rate-matchers to a radio frame. Here, the DEMUX 141 separates an information symbol, a first parity symbol, and a second parity symbol from a radio frame stream received from the radio frame segmenter 130.

The component rate matchers 142, 143, and 144 rate match the information symbol, the first parity symbol, and the second parity symbol from the DEMUX 141, respectively, by puncturing or repetition. The component rate matcher 142 just bypasses the received information symbol without real puncturing, whereas component rate matchers 143 and 144 puncture the received parity symbols according to a preset pattern determined by the ratio of the number of input symbols to the number of output symbols. In most of the real cases, the component rate matchers 143 and 144 just bypass the received parity symbols without real repetition except heavy repetition of the encoded symbols, whereas the component rate matcher 142 repeats the received information symbols according to a preset pattern determined by the ratio of the number of input symbols to the number of output symbols. The MUX 145 multiplexes the symbols received from the component rate matchers 142, 143, and 144 to one stream according to the same switching pattern as used in the DEMUX 141.

FIG. 15 is a block diagram of a DEMUX and MUX controlling apparatus according to the third embodiment of the present invention.

Referring to FIG. 15, upon receipt of a TTI and a radio frame length from the host 200, the controller 210 feeds the TTI and the radio frame index of a current radio frame to memory 220 (see Table 18) and receives the initial symbol of the current radio frame from memory 220. Then, the controller 210 controls the switching operations of

the DEMUX 141 and the MUX 145 based on the initial symbol and a repeating/puncturing pattern determined by the TTI. The DEMUX 141 separates the current radio frame symbols into input for the component rate matchers and the MUX 145 multiplexes the output symbols of the rate matchers to a radio frame. Here, the DEMUX 141 separates an information symbol, a first parity symbol, and a second parity symbol from a radio frame stream received from the radio frame segmenter 130. The component rate matchers 142, 143, and 144 rate match the information symbol, the first parity symbol, and the second parity symbol from the DEMUX 141, respectively, by puncturing or repetition. The component rate matcher 142 just bypasses the received information symbol without real rate puncturing, whereas component rate matchers 143 and 144 puncture or repeat the received parity symbols according to a pattern preset determined by the ratio of the number of input symbols to the number of output symbols. The MUX 145 multiplexes the symbols received from the component rate matchers 142, 143, and 145 to one stream according to the same switching pattern as used in the DEMUX 141. In most of the real cases, the component rate matchers 143 and 144 just bypass the received parity symbols without real repetition except heavy repetition of the encoded symbols, whereas the component rate matcher 142 repeats the received information symbols according to a preset pattern determined by the ratio of the number of input symbols to the number of output symbols.

As described above, the present invention is advantageous in that effective rate matching can be performed by adding a DEMUX before a rate matching unit to separate an information symbol and parity symbols of the encoded symbols when the information symbol is not to be punctured for rate matching in an uplink transmitter in a mobile communication system.

While the invention has been shown and described with reference to certain preferred embodiments thereof, it will be understood by those skilled in the art that

various changes in form and details may be made therein without departing from the spirit and scope of the invention as defined by the appended claims.

```

set.seed(1234)
n = 1000
n1 = n/2
n2 = n/2
n3 = n/2
n4 = n/2
n5 = n/2
n6 = n/2
n7 = n/2
n8 = n/2
n9 = n/2
n10 = n/2
n11 = n/2
n12 = n/2
n13 = n/2
n14 = n/2
n15 = n/2
n16 = n/2
n17 = n/2
n18 = n/2
n19 = n/2
n20 = n/2
n21 = n/2
n22 = n/2
n23 = n/2
n24 = n/2
n25 = n/2
n26 = n/2
n27 = n/2
n28 = n/2
n29 = n/2
n30 = n/2
n31 = n/2
n32 = n/2
n33 = n/2
n34 = n/2
n35 = n/2
n36 = n/2
n37 = n/2
n38 = n/2
n39 = n/2
n40 = n/2
n41 = n/2
n42 = n/2
n43 = n/2
n44 = n/2
n45 = n/2
n46 = n/2
n47 = n/2
n48 = n/2
n49 = n/2
n50 = n/2
n51 = n/2
n52 = n/2
n53 = n/2
n54 = n/2
n55 = n/2
n56 = n/2
n57 = n/2
n58 = n/2
n59 = n/2
n60 = n/2
n61 = n/2
n62 = n/2
n63 = n/2
n64 = n/2
n65 = n/2
n66 = n/2
n67 = n/2
n68 = n/2
n69 = n/2
n70 = n/2
n71 = n/2
n72 = n/2
n73 = n/2
n74 = n/2
n75 = n/2
n76 = n/2
n77 = n/2
n78 = n/2
n79 = n/2
n80 = n/2
n81 = n/2
n82 = n/2
n83 = n/2
n84 = n/2
n85 = n/2
n86 = n/2
n87 = n/2
n88 = n/2
n89 = n/2
n90 = n/2
n91 = n/2
n92 = n/2
n93 = n/2
n94 = n/2
n95 = n/2
n96 = n/2
n97 = n/2
n98 = n/2
n99 = n/2
n100 = n/2

```

WHAT IS CLAIMED IS:

1. An uplink transmitting device in a mobile communication system,
5 comprising:

an encoder for receiving an information bit stream and for generating an information symbol, a first parity symbol, and a second parity symbols by encoding the information bit stream;

an interleaver for interleaving the encoded symbols by a predetermined
10 interleaving rule;

a radio frame segmenter for receiving symbols from the interleaver and outputting the received symbols in at least one radio frame, each of the at least one radio frame having the same size;

a demultiplexer for demultiplexing each of the at least one radio frame received
15 from the radio frame segmenter into three streams, one of information symbols, one of first parity symbols, and one of second parity symbols; and

a rate matcher for bypassing the information symbols and for puncturing parts of the first and second parity symbols according to a given rate matching rule.

20 2. The transmitting device of claim 1, wherein the size of the at least one radio frame is 10ms.

3. The transmitting device of claim 1, wherein the information bit stream is transmitted at a predetermined transmission time interval (TTI), said TTI being one of
25 10, 20, 40, and 80ms.

4. The transmitting device of claim 1, wherein the interleaving rule is a bit reverse column transposition method.

5. The transmitting device of claim 1, wherein the symbols in each radio frame are repeated according to a pattern.

5 6. The transmitting device of claim 1, wherein several of the at least one radio frame generated from the radio frame segmenter have a different initial symbol.

7. The transmitting device of claim 6, wherein a plurality of the at least one radio frame have initial symbols determined by TTI.

10 8. The transmitting device of claim 5, wherein the demultiplexer demultiplexes each of the symbols in the at least one radio frame into information symbols, first parity symbols, and second parity symbols according to a switching rule determined by the TTI and the repetition pattern of each of the radio frames.

15 9. The transmitting device of claim 8, further comprising:
a memory for storing initial symbols of a plurality of at least one radio frame;
and
a controller for controlling the demultiplexer according to the repetition pattern
20 and the stored initial symbols of the at least one radio frame.

10. The transmitting device of claim 9, further comprising:
a multiplexer for multiplexing the outputs of the rate matcher according to the controller controlling the demultiplexer.

25 11. The transmitting device of claim 1, wherein the interleaver inserts filler bits between the symbols in order to equalize the size of radio frames.

12. The transmitting device of claim 1, wherein the rate matcher comprises:
 a first component rate matcher for rate-matching the information symbols;
 a second component rate matcher for rate-matching the first parity symbols; and
 a third component rate matcher for rate-matching the second parity symbols.

5

13. A transmitting device in a mobile communication system, comprising:
 an encoder for receiving an information bit stream transmitted at a
 predetermined transmission time interval (TTI) and for generating an information
 symbol and at least one parity symbol corresponding to the information symbol by
 encoding each of the received information bit, the number of the at least one parity
 symbol corresponding to each information symbol being dependent on a coding rate of
 said encoder;

10

an interleaver for receiving the information symbols and the parity symbols from
 the encoder, for interleaving the information symbols and the parity symbols, and for
 outputting interleaved symbols;

15

a radio frame segmenter for receiving the interleaved symbols from the
 interleaver, for dividing the received symbols into at least one radio frame, and for
 outputting the at least one radio frame, each of the at least one radio frame having a
 predetermined time frame;

20

a rate matcher for rate matching received symbols and for outputting rate
 matched symbols, said rate matcher having an information symbol component for rate
 matching information symbols and at least one parity symbol component for rate
 matching parity symbols, the number of parity symbol components being equal to the
 number of the parity symbols corresponding to each information symbol; and

25

a demultiplexer for receiving the at least one radio frame and for demultiplexing
 the symbols in each of the at least one radio frame by switching each of the symbols in
 the radio frames to a corresponding component in the rate matcher;

wherein the demultiplexer switches in accordance with a symbol repetition

pattern assigned to each of the radio frames.

14. The transmitter device of claim 13, wherein the symbol repetition pattern is determined by the TTI.

15. The transmitter device of claim 14, wherein the symbol repetition pattern is further determined by the coding rate.

16. The transmitter device of claim 14, wherein the symbol repetition pattern is further determined by the total number of filler bits used by the radio frame segmenter.

17. The transmitter device of claim 13, further comprising:
a multiplexer for multiplexing the rate matched symbols by synchronizing the multiplexing with the demultiplexer by switching to the corresponding component in the rate matcher.

18. The transmitter device of claim 17, further comprising:
a controller for controlling the switching of the demultiplexer and the multiplexer based on the TTI and the length of each of the at least one radio frame.

19. The transmitter device of claim 18, wherein the controller controls the switching based on the total number of filler bits used by the radio frame segmenter.

20. The transmitter device of claim 13, wherein the predetermined time frame of each of the at least one radio frame is 10ms.

21. The transmitter device of claim 13, wherein the TTI is one of 10, 20, 40

and 80 ms.

22. The transmitter device of claim 13, wherein the coding rate is $1/3$.

23. The transmitter device of claim 13, wherein the interleaver inserts filler bits between the interleaved symbols.

24. The transmitter device of claim 13, wherein the radio segmenter inserts filler bits into the at least one radio frame.

25. The transmitter device of claim 18, further comprising a memory for storing the symbol repetition pattern including an initial symbol of each of the at least one radio frame.

26. The transmitter device of claim 13, wherein the encoder is a turbo encoder.

27. A method of transmitting in a mobile communication system, the method comprising the steps of:

receiving an information bit stream transmitted at a predetermined transmission time interval (TTI);

generating an information symbol and at least one parity symbol corresponding to the information symbol by encoding each of the received information bit, the number of the parity symbols corresponding to each information symbol being dependent on a coding rate of said encoder;

interleaving the information symbols and the parity symbols and outputting interleaved symbols;

dividing the interleaved symbols into at least one radio frame and outputting the

at least one radio frame, each of the at least one radio frame having a predetermined time frame;

demultiplexing the symbols in each of the at least one radio frame by switching each of the symbols in the at least one radio frame to a corresponding component in a rate matcher, said rate matcher having an information symbol component for rate matching information symbols and at least one parity symbol component for rate matching parity symbols, the number of parity symbol components being equal to the number of the parity symbols corresponding to each information symbol; and

rate matching the demultiplexed symbols;

wherein the information symbols are switched to the information symbol component and the parity symbols are switched to the parity symbol component in accordance with a symbol repetition pattern assigned to each of the at least one radio frame.

28. The method of claim 27, wherein the symbol repetition pattern is determined by the TTI.

29. The method of claim 28, wherein the symbol repetition pattern is further determined by the coding rate.

30. The method of claim 28, wherein the symbol repetition pattern is further determined by a total number of filler bits used by a radio frame segmenter.

31. The method of claim 27, further comprising the step of:
multiplexing the rate matched symbols by synchronizing the multiplexing with the demultiplexing through switching to the corresponding component in the rate matcher.

32. The method of claim 27, wherein the predetermined time frame of each of at least one radio frame is 10ms.

33. The method of claim 27, wherein the TTI is one of 10, 20, 40 and 80 ms.

34. The method of claim 27, wherein the coding rate is $1/3$.

35. The method of claim 27, further comprising the step of: inserting filler bits into the interleaved symbols.

36. The method of claim 27, further comprising the step of: inserting filler bits into the radio frames.

37. A transmitting device in a mobile communication system, comprising:
an encoder for receiving an information bit stream transmitted at a predetermined transmission time interval (TTI) and for generating an information symbol and at least one kind of parity symbol corresponding to the information symbol by encoding each of the received information bits, the number of the parity symbols corresponding to each information symbol being dependent on a coding rate of said encoder;

an interleaver for receiving the information symbols and the parity symbols from the encoder, for interleaving the information symbols and the parity symbols, and for outputting interleaved symbols in a plurality of radio frames, each of the radio frames having a predetermined number of symbols;

a rate matcher for rate matching received symbols, said rate matcher having an information symbol component for rate matching information symbols and at least one parity symbol component for rate matching parity symbols; and

a demultiplexer for receiving the radio frames and for demultiplexing the symbols in each of the radio frames by switching each of the symbols to a corresponding component in the rate matcher.

5 38. The transmitter device of claim 37, wherein the demultiplexer switches in order to separate the information symbols and the parity symbols.

 39. The transmitter device of claim 37, wherein the information symbol component operates to repeat a part of the information symbols.

10 40. The transmitter device of claim 37, wherein the radio frames have symbol repetition patterns.

 41. The transmitter device of claim 40, wherein the symbol repetition patterns are determined by the total number of filler bits.

15 42. The transmitter device of claim 37, further comprising:
20 a multiplexer for synchronously multiplexing the output symbols of the rate matchers by synchronizing with the demultiplexer.

25 43. The transmitter device of claim 42, further comprising:
 a controller for controlling the switching of the demultiplexer and the
30 multiplexer based on an initial symbol and repetition pattern.

44. The transmitter device of claim 43, wherein the controller controls the switchings based on the total number of filler bits.

45. The transmitter device of claim 37, wherein a predetermined time frame of each of the radio frames is 10ms.

46. The transmitter device of claim 37, wherein the TTI is one of 10, 20, 40 and 80 ms.

47. The transmitter device of claim 37, wherein the coding rate is 1/3.

48. The transmitter device of claim 37, wherein the interleaver inserts filler bits in order to equalize the size of radio frames.

49. The transmitter device of claim 41, further comprising:
a memory for storing the symbol repetition pattern including an initial symbol of each of the radio frames.

50. The transmitter device of claim 37, wherein the encoder is a turbo encoder.

51. A method of transmitting in a mobile communication system, the method comprising the steps of:

receiving an information bit stream at a predetermined transmission time interval (TTI);

generating information symbols and at least one kind of parity symbols corresponding to the information symbol by encoding each of the received information bits;

interleaving the information symbols and the parity symbols and outputting interleaved symbols in a plurality of radio frames;

demultiplexing the symbols in each of the radio frames by switching each of the symbols in the radio frames to a corresponding component in a rate matcher, said rate
 5 matcher having an information symbol component for rate matching information symbols and at least one parity symbol component for rate matching parity symbols; and
 rate matching the demultiplexed symbols;

wherein the information symbols are switched to the information symbol component and the parity symbols are switched to the parity symbol component in
 10 accordance with a symbol repetition pattern assigned to each of the radio frames.

52. The method of claim 51, wherein the symbol repetition pattern is determined by the TTI.

15 53. The method of claim 52, wherein the symbol repetition pattern is further determined by an index of each of the radio frames.

54. The method of claim 52, wherein the symbol repetition pattern is further determined by a total number of filler bits.

20 55. The method of claim 51, further comprising the step of:
 multiplexing the output symbols of the rate matching step by synchronizing the multiplexing with the demultiplexing by switching to the corresponding component in the rate matcher.

25 56. The method of claim 51, wherein a predetermined time frame of each of the radio frames is 10ms.

57. The method of claim 51, wherein the TTI is one of 10, 20, 40 and 80
ms.

58. The method of claim 51, wherein the coding rate is $1/3$.

59. The method of claim 51, further comprising the step of:
inserting filler bits in order to make the radio frames equal in size.

60. The method of claim 51, further comprising the step of:
inserting filler bits before outputting the interleaved symbols.

ABSTRACT

A transmitting device in a mobile communication system is disclosed. In the transmitting device, an encoder receives an information bit stream in a frame, which is as long as an integer multiple of a predetermined value, and generates an information symbol, a first parity symbol, and a second parity symbol by encoding each information bit. An interleaver sequentially arranges the information symbols and the first and second parity symbols by rows in an array with an integer number of rows and an integer number of columns. The interleaver reorders the columns in the array according to a predetermined rule. The interleaver further outputs a plurality of radio frames in a stream, by reading the symbols by going down each column, starting at the leftmost column and proceeding right. Each radio frame has a predetermined size. A demultiplexer demultiplexes each of the radio frames received from the interleaver into a stream of information symbols, a stream of first parity symbols, and a stream of second parity symbols. A rate matcher bypasses the stream of information symbols and punctures the streams of the first and second parity symbols for rate matching. The rate matcher works similarly when performing repetition rather than puncturing.

FIG. 1

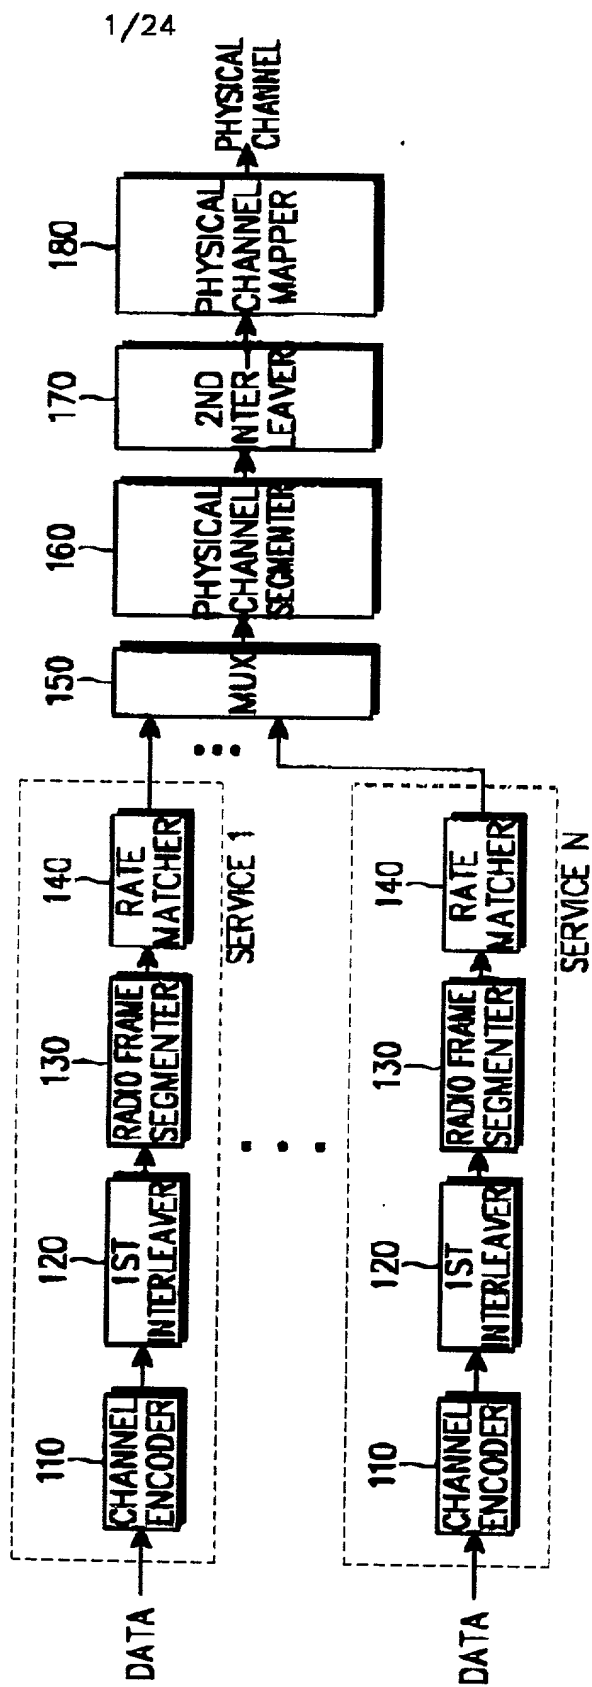
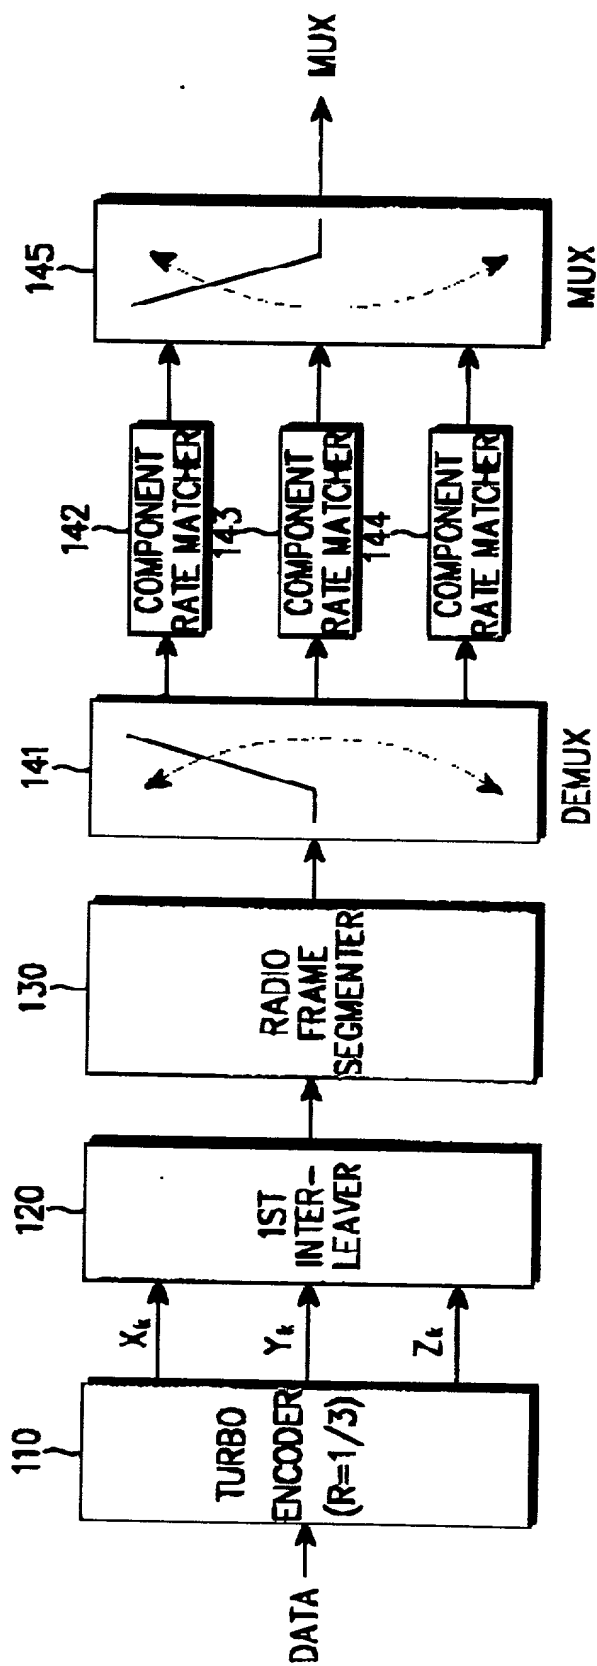


FIG. 2



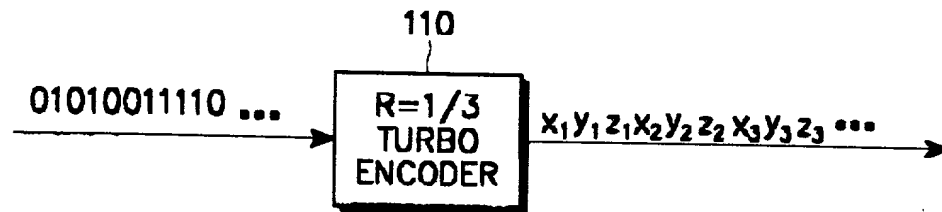


FIG. 3

1st INTERLEAVER INPUT(CODE RATE R=1/3)

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56
57	58	59	60	61	62	63	64
65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96
97	98	99	100	101	102	103	104
105	106	107	108	109	110	111	112
113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128
129	130	131	132	133	134	135	136
137	138	139	140	141	142	143	144
145	146	147	148	149	150	151	152
153	154	155	156	157	158	159	160

FIG. 4

000120" 890ET 950

Table 1. Mean values of the variables measured in the 1000 m and 2000 m races in the 1996 and 1997 seasons. The values are expressed in seconds (s) and in percentage of the total race time (%T). The values are expressed in seconds (s) and in percentage of the total race time (%T). The values are expressed in seconds (s) and in percentage of the total race time (%T).

Variable	1996	1997
1000 m		
Time (s)	1000	1000
%T	100	100
2000 m		
Time (s)	2000	2000
%T	100	100

1ST INTERLEAVER OUTPUT WHEN TTI=20msec (CODE RATE=1/3)

1	3	5	7	9	11	13	15
17	19	21	23	25	27	29	31
33	35	37	39	41	43	45	47
49	51	53	55	57	59	61	63
65	67	69	71	73	75	77	79
81	83	85	87	89	91	93	95
97	99	101	103	105	107	109	111
113	115	117	119	121	123	125	127
129	131	133	135	137	139	141	143
145	147	149	151	153	155	157	159
2	4	6	8	10	12	14	16
18	20	22	24	26	28	30	32
34	36	38	40	42	44	46	48
50	52	54	56	58	60	62	64
66	68	70	72	74	76	78	80
82	84	86	88	90	92	94	96
98	100	102	104	106	108	110	112
114	116	118	120	122	124	126	128
130	132	134	136	138	140	142	144
146	148	150	152	154	156	158	160

FIG. 5A

6/24

1ST INTERLEAVER OUTPUT WHEN $T_{TI}=40\text{msec}$ (CODE RATE=1/3)

1	5	9	13	17	21	25	29
33	37	41	45	49	53	57	61
65	69	73	77	81	85	89	93
97	101	105	109	113	117	121	125
129	133	137	141	145	149	153	157
3	7	11	15	19	23	27	31
35	39	43	47	51	55	59	63
67	71	75	79	83	87	91	95
99	103	107	111	115	119	123	127
131	135	139	143	147	151	155	159
2	6	10	14	18	22	26	30
34	38	42	46	50	54	58	62
66	70	74	78	82	86	90	94
98	102	106	110	114	118	122	126
130	134	138	142	146	150	154	158
4	8	12	16	20	24	28	32
36	40	44	48	52	56	60	64
68	72	76	80	84	88	92	96
100	104	108	112	116	120	124	128
132	136	140	144	148	152	156	160

FIG. 5B

000120" 89061960

7/24

1ST INTERLEAVER OUTPUT WHEN TTI=80mSEC(CODE RATE=1/3)

1	9	17	25	33	41	49	57
65	73	81	89	97	105	113	121
129	137	145	153	5	13	21	29
37	45	53	61	69	77	85	93
101	109	117	125	133	141	149	157
3	11	19	27	35	43	51	59
67	75	83	91	99	107	115	123
131	139	147	155	7	15	23	31
39	47	55	63	71	79	87	95
103	111	119	127	135	143	151	159
2	10	18	26	34	42	50	58
66	74	82	90	98	106	114	122
130	138	146	154	6	14	22	30
38	46	54	62	70	78	86	94
102	110	118	126	134	142	150	158
4	12	20	28	36	44	52	60
68	76	84	92	100	108	116	124
132	140	148	156	8	16	24	32
40	48	56	64	72	80	88	96
104	112	120	128	136	144	152	160

FIG. 5C

09613068-01000

8/24

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56
57	58	59	60	61	62	63	64
65	66	67	68	69	70	71	72
73	74	75	76	77	78	79	80
81	82	83	84	85	86	87	88
89	90	91	92	93	94	95	96
97	98	99	100	101	102	103	104
105	106	107	108	109	110	111	112
113	114	115	116	117	118	119	120
121	122	123	124	125	126	127	128
129	130	131	132	133	134	135	136
137	138	139	140	141	142	143	144
145	146	147	148	149	150	151	152
153	154	155	156	157	158	159	160

FIG. 6

000720"090ET960

9/24

1ST INTERLEAVER OUTPUT WHEN $T_{PI}=20\text{msec}$ (CODE RATE $R=1/2$)

1	3	5	7	9	11	13	15
17	19	21	23	25	27	29	31
33	35	37	39	41	43	45	47
49	51	53	55	57	59	61	63
65	67	69	71	73	75	77	79
81	83	85	87	89	91	93	95
97	99	101	103	105	107	109	111
113	115	117	119	121	123	125	127
129	131	133	135	137	139	141	143
145	147	149	151	153	155	157	159
2	4	6	8	10	12	14	16
18	20	22	24	26	28	30	32
34	36	38	40	42	44	46	48
50	52	54	56	58	60	62	64
66	68	70	72	74	76	78	80
82	84	86	88	90	92	94	96
98	100	102	104	106	108	110	112
114	116	118	120	122	124	126	128
130	132	134	136	138	140	142	144
146	148	150	152	154	156	158	160

FIG. 7A

10/24

1ST INTERLEAVER OUTPUT WHEN TTI=40msec (CODE RATE R=1/2)

1	5	9	13	17	21	25	29
33	37	41	45	49	53	57	61
65	69	73	77	81	85	89	93
97	101	105	109	113	117	121	125
129	133	137	141	145	149	153	157
3	7	11	15	19	23	27	31
35	39	43	47	51	55	59	63
67	71	75	79	83	87	91	95
99	103	107	111	115	119	123	127
131	135	139	143	147	151	155	159
2	6	10	14	18	22	26	30
34	38	42	46	50	54	58	62
66	70	74	78	82	86	90	94
98	102	106	110	114	118	122	126
130	134	138	142	146	150	154	158
4	8	12	16	20	24	28	32
36	40	44	48	52	56	60	64
68	72	76	80	84	88	92	96
100	104	108	112	116	120	124	128
132	136	140	144	148	152	156	160

FIG. 7B

000720" 890ET960

11/24

1ST INTERLEAVER OUTPUT WHEN $T_{TI}=80\text{msec}$ (CODE RATE $R=1/2$)

1	9	17	25	33	41	49	57
65	73	81	89	97	105	113	121
129	137	145	153	5	13	21	29
37	45	53	61	69	77	85	93
101	109	117	125	133	141	149	157
3	11	19	27	35	43	51	59
67	75	83	91	99	107	115	123
131	139	147	155	7	15	23	31
39	47	55	63	71	79	87	95
103	111	119	127	135	143	151	159
2	10	18	26	34	42	50	58
66	74	82	90	98	106	114	122
130	138	146	154	6	14	22	30
38	46	54	62	70	78	86	94
102	110	118	126	134	142	150	158
4	12	20	28	36	44	52	60
68	76	84	92	100	108	116	124
132	140	148	156	8	16	24	32
40	48	56	64	72	80	88	96
104	112	120	128	136	144	152	160

FIG. 7C

12/24

$T_{II} = 10\text{msec}$

RF

x
y
z
x
y
z
...

FIG. 8A

$T_{II} = 20\text{msec}$

RF1

RF2

x	y
z	x
y	z
x	y
z	x
y	z
...	...

FIG. 8B

13/24

$T_{II} = 40\text{msec}$

RF1	RF2	RF3	RF4
x	z	y	x
y	x	z	y
z	y	x	z
x	z	y	x
y	x	z	y
z	y	x	z
⋮	⋮	⋮	⋮

FIG. 8C

$T_{II} = 80\text{msec}$

RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8
x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮

FIG. 8D

000720" 830ET 852

1ST INTERLEAVER INPUT WHEN $T_I = 80\text{msec}$

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	x	y	z				

FIG. 9A

1ST INTERLEAVER OUTPUT

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z		y		x		z	

FIG. 9B

RADIO FRAME SEGMENTER OUTPUT (WITH FILLER BITS INSERTED)

RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8
x	y	y	z	z	y	z	y
z	x	x	y	y	x	y	x
y	z	z	x	x	z	x	z
x	y	y	y	z	x	z	y
z	z	x	x	0	0	0	0

FIG. 9C

1ST INTERLEAVER INPUT WHEN $T_{TI} = 40\text{msec}$

x	y	z	x
y	z	x	y
z	x	y	z
x	y	z	x
y	z	x	y
z			

FIG. 10A

1ST INTERLEAVER OUTPUT

x	z	y	x
y	x	z	y
z	y	x	z
x	z	y	x
y	x	z	y
z			

FIG. 10B

RADIO FREAME SEGMENTER OUTPUT (WITH FILLER BITS INSERTED)

RF1	RF2	RF3	RF4
x	z	y	x
y	x	z	y
z	y	x	z
x	z	y	x
y	x	z	y
z	0	0	0

FIG. 10C

1ST INTERLEAVER INPUT WHEN $T_{TI} = 80\text{msec}$

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	x	y	z				

FIG. 11A

1ST INTERLEAVER OUTPUT

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z		y		x		z	

FIG. 11B

FIRST INTERLEAVER OUTPUT (WITH FILLER BITS INSERTED)

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	0	y	0	x	0	z	0

FIG. 11C

RADIO FRAME SEGMENTER OUTPUT

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	0	y	0	x	0	z	0

FIG. 11D

1ST INTERLEAVER INPUT WHEN TTI = 80msec

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	x	y	z				

FIG. 12A

1ST INTERLEAVER OUTPUT

x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z		y		x		z	

FIG. 12B

RADIO FRAME SEGMENTER OUTPUT

RF1	RF2	RF3	RF4	RF5	RF6	RF7	RF8
x	y	z	x	y	z	x	y
z	x	y	z	x	y	z	x
y	z	x	y	z	x	y	z
x	y	z	x	y	z	x	y
z	0	y	0	x	0	z	0

FIG. 12C

000720" B305T960

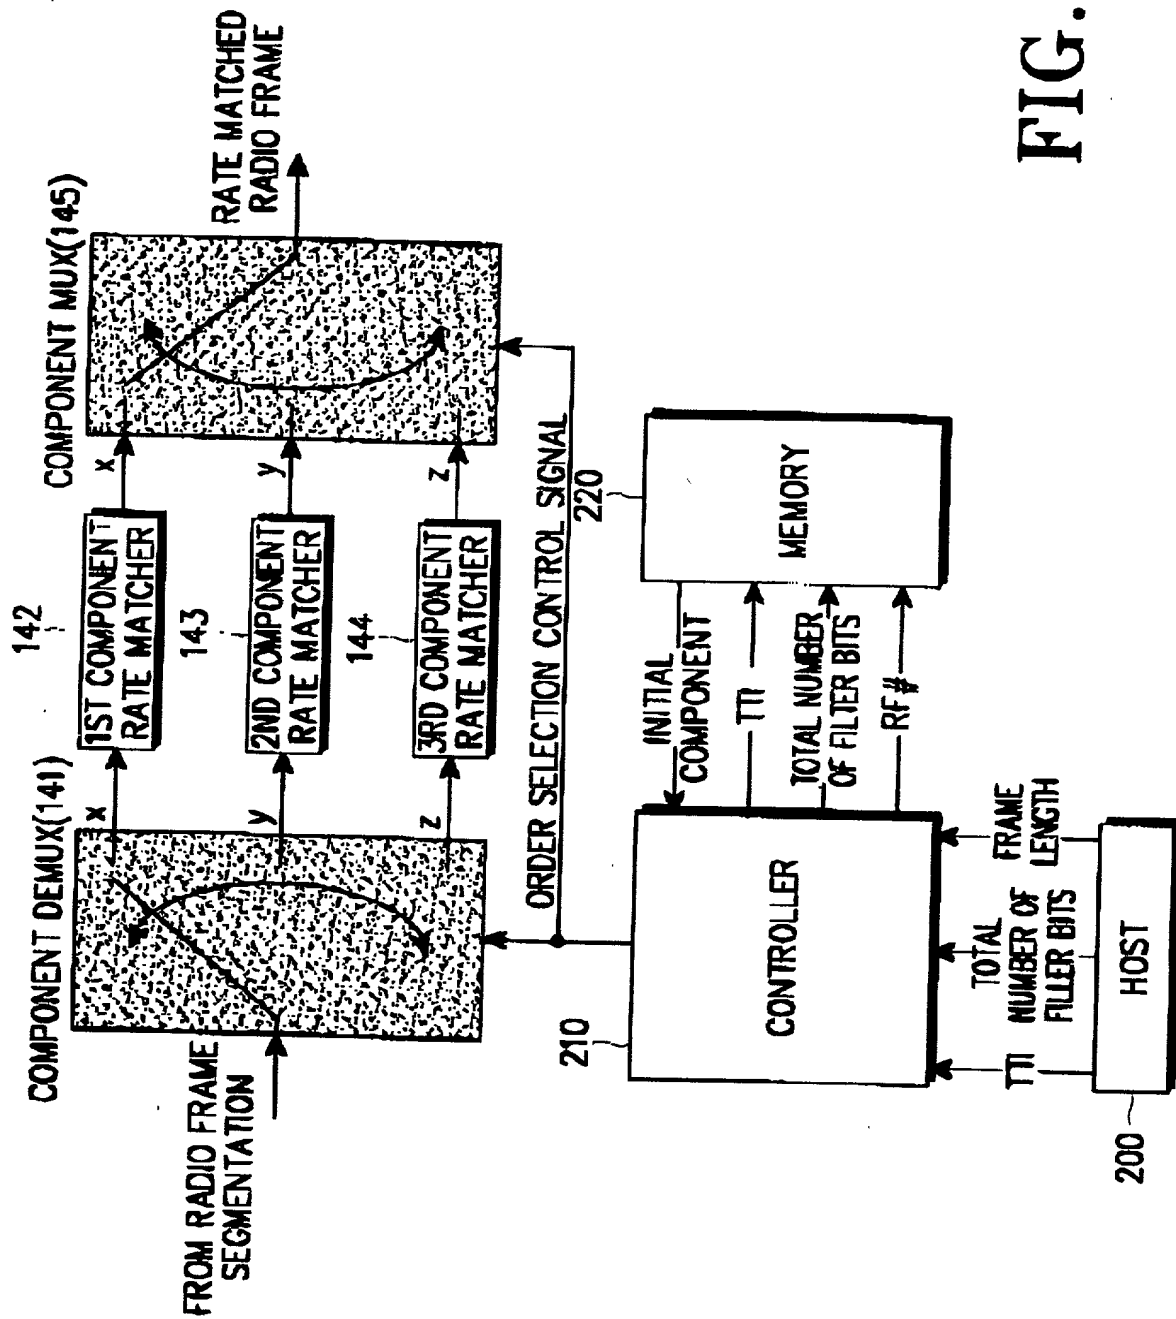


FIG. 13

000740" 89057950

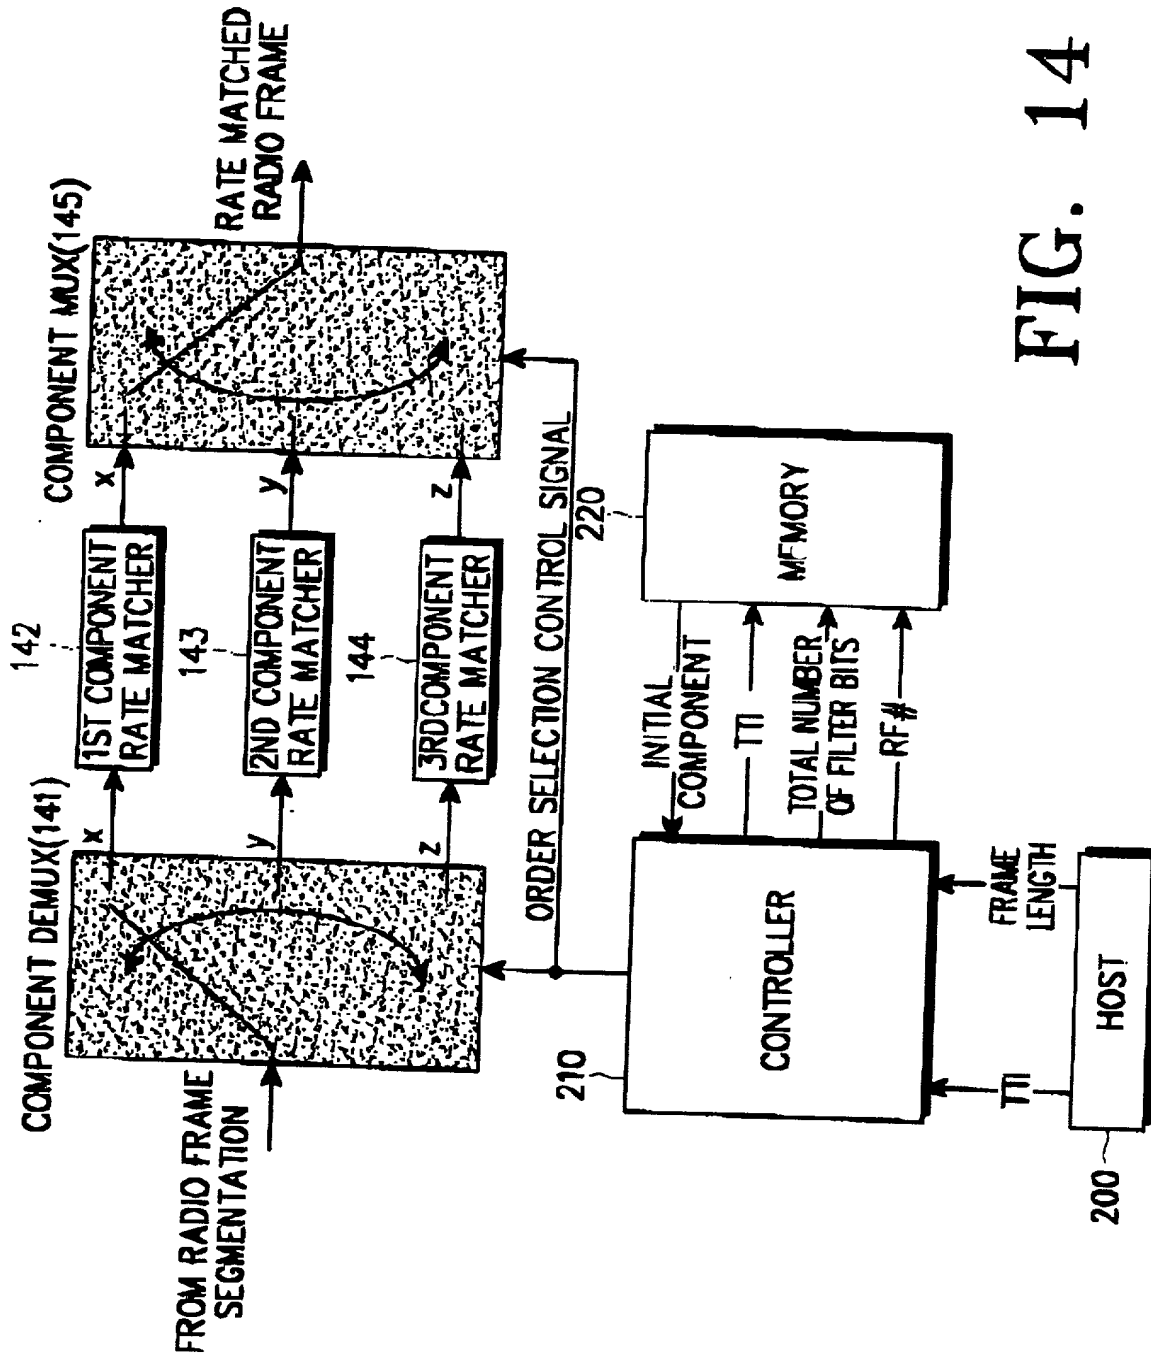


FIG. 14

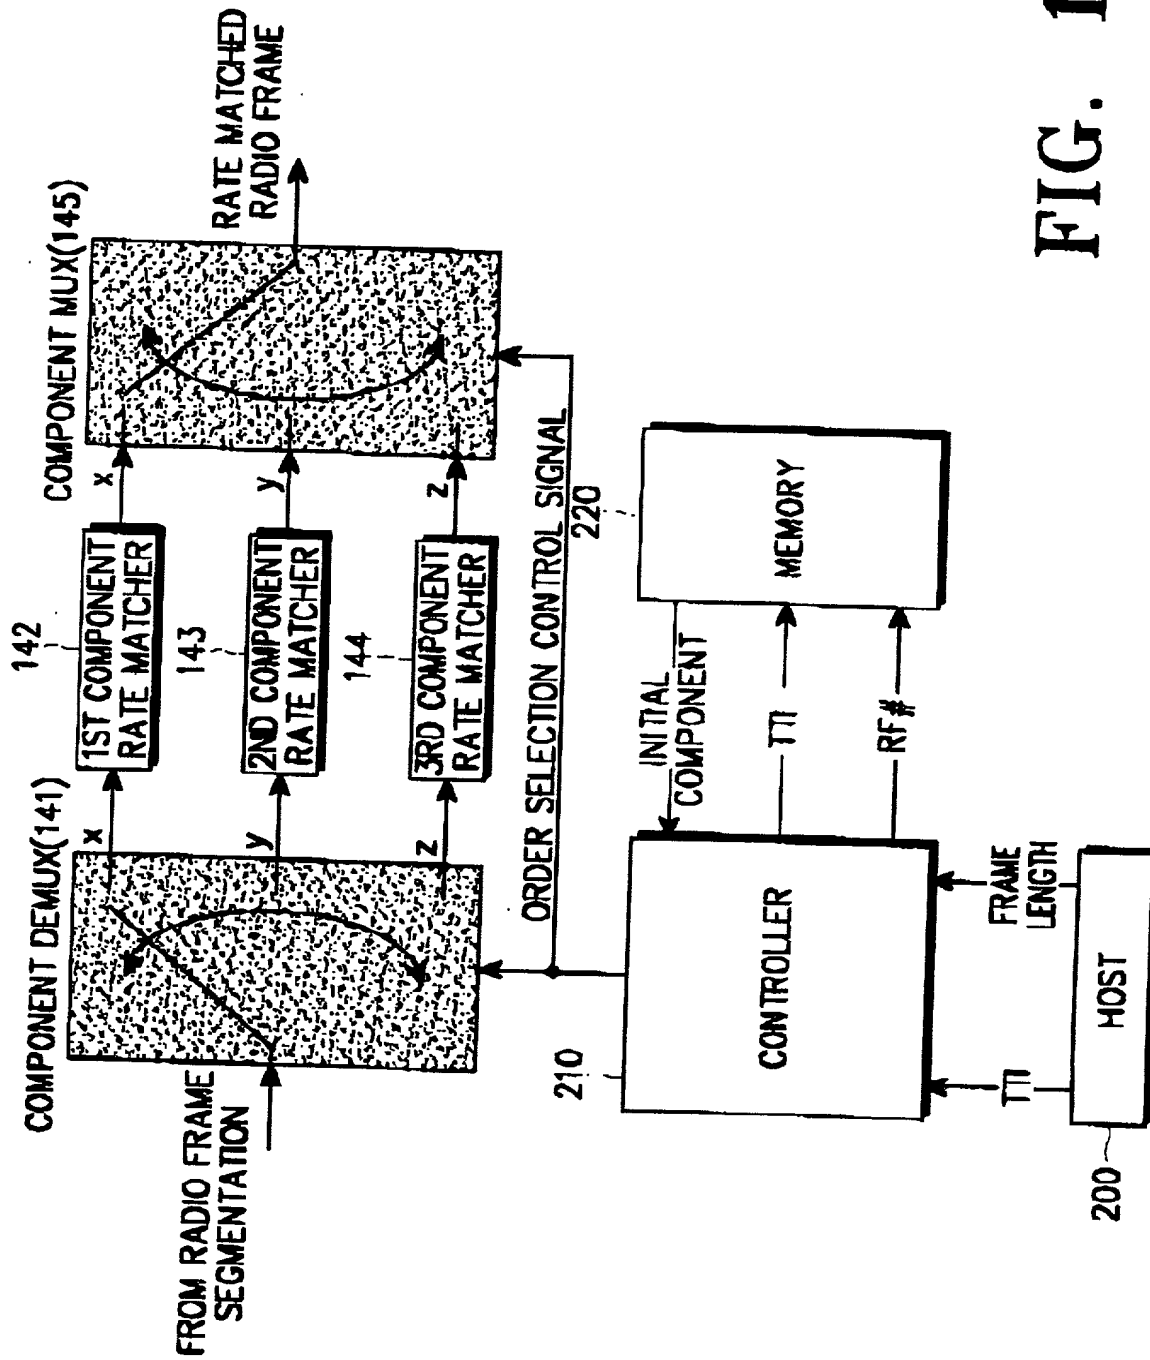


FIG. 15

PTO/SB/01 (6/95)

DECLARATIONDocket No. 678-514 (P9464)

AS A BELOW NAMED INVENTOR, I hereby declare that:

My residence, post office address and citizenship are as stated next to my name.

I believe that I am the original, first and sole (if only one name is listed below), or an original, first and joint inventor (if plural names are listed below), of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE: Apparatus and method for controlling a demultiplexer and a multiplexer used for rate matching in a mobile communication system
the specification of which either is attached hereto or indicates an attorney docket no. 678-514 (P9464) or:

[] was filed in the U.S. Patent & Trademark Office on _____ and assigned Serial No. _____,

[] and (if applicable) was amended on _____,

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability and to the examination of this application in accordance with Title 37 of the Code of Federal Regulations 51.56. I hereby claim foreign priority benefits under Title 35, U.S. Code §119(a)-(d) or §365(h) of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designated at least one country other than the United States, or §119(e) of any United States provisional application(s), listed below and have also identified below any foreign applications for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

			Priority Claimed:
(Application Number)	(Country)	(Day/Month/Year filed)	Yes [X] No []
<u>1999-27407</u>	<u>Korea</u>	<u>08/07/1999</u>	
<u>1999-30096</u>	<u>Korea</u>	<u>23/07/1999</u>	
<u>1999-37496</u>	<u>Korea</u>	<u>30/08/1999</u>	

I hereby claim the benefit under Title 35, U.S. Code, §120, of any United States application(s), or §366(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application(s) in the manner provided by the first paragraph of Title 35, U.S. Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, The Code of Federal Regulations, §1.56(a) which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial Number)	(Filing Date)	(STATUS: patented, pending, abandoned)
-----------------------------	---------------	--

I hereby appoint the following attorneys: PETER G. DILWORTH, Reg. No. 26,460; ROCCO S. BARRHESE, Reg. No. 26,263; DAVID M. CARTER, Reg. No. 30,949; PAUL J. FARRELL, Reg. No. 33,494; PETER DELIICA, Reg. No. 32,978; JEFFREY B. STEEN, Reg. No. 32,063; ADRIAN T. CALDERONE, Reg. No. 31,746; GEORGE M. KAPLAN, Reg. No. 28,375; JOSEPH W. SCHMIDT, Reg. No. 36,920; RAYMOND E. FARRELL, Reg. No. 34,818; RUSSELL R. KAGGNER, Reg. No. 36,183; CHRISTOPHER G. TRINOR, Reg. No. 39,517; GEORGE LIKOURFZOS, Reg. No. 40,067; JAMES M. LOEFFLER, Reg. No. 37,873; EDWARD C. MEAGHER, Reg. No. 41,189; SUSAN L. HEGG, Reg. No. 37,360; MICHAEL P. DILWORTH, Reg. No. 37,311; PETER B. SORFEL, Reg. No. 44,349; and GLENN D. SMITH, Reg. No. 42,156, each of them of DILWORTH & BARRESE, 333 Earle Ovington Boulevard, Uniondale, New York 11553 to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith and with any divisional, continuation, continuation-in-part, reissue or re-examination application, with full power of appointment and with full power to substitute an Associate attorney or agent, and to receive all patents which may issue thereon, and request that all correspondence be addressed to:

Paul J. Farrell, Esq.
DILWORTH & BARRESE
333 Earle Ovington Boulevard
Uniondale, New York 11553
Tel. No.: (516) 228-8484

I HEREBY DECLARE that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under §1001 of Title 18 U.S. Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST OR SOLE INVENTOR: Se-Hyoung KIM Citizenship Korea

Inventor's signature: [Signature] Date: 7 July 2000
Residence & Post Office Address: Misong APT. #2002, Songpa 2-dong, Songpa-gu, Seoul, Korea

FULL NAME OF SECOND JOINT INVENTOR: Min-Goo KIM Citizenship Korea

Inventor's signature: [Signature] Date: 7 July 2000
Residence & Post Office Address: 973-3, Youngtong-dong, Paltal-gu, Suwon-shi, Kyonggi-do, Korea

FULL NAME OF THIRD JOINT INVENTOR: Beong-Jo KIM Citizenship Korea

Inventor's signature: [Signature] Date: 7 July 2000
Residence & Post Office Address: Mujigae-maeul #201, Kumi-dong, Puntang-gu, Songnam-shi, Kyonggi-do, Korea

FULL NAME OF FOURTH JOINT INVENTOR: Soon-Jae CHOI Citizenship Korea

Inventor's signature: [Signature] Date: 7 July 2000
Residence & Post Office Address: Kyongnam APT. #707-402, Yatap-dong, Puntang-gu, Songnam-shi, Kyonggi-do, Korea

FULL NAME OF FIFTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

FULL NAME OF SIXTH JOINT INVENTOR: _____ Citizenship _____

Inventor's signature: _____ Date: _____
Residence & Post Office Address: _____

Page 2 of 2